




Aeolus Elite 35 TLR Disc Front Road Wheel



Wheel Components

| TCG Part Number | Description |
|-----------------|---|
| 599069/598987 | Wheel |
| NA | Hub (OE use only, not available for aftermarket purchase) |
| NA | Rim |
| 1052302 | Rim Decal Black |
| W593684 | Drive Side Spokes |
| W593685 | Non-Drive Side Spokes |
| 433068 | Nipples |
| W322024 | Standard Rim Strip |
| W514417 | Tubeless Rim Strip |
| 566764 | Tubeless Valve Stem |

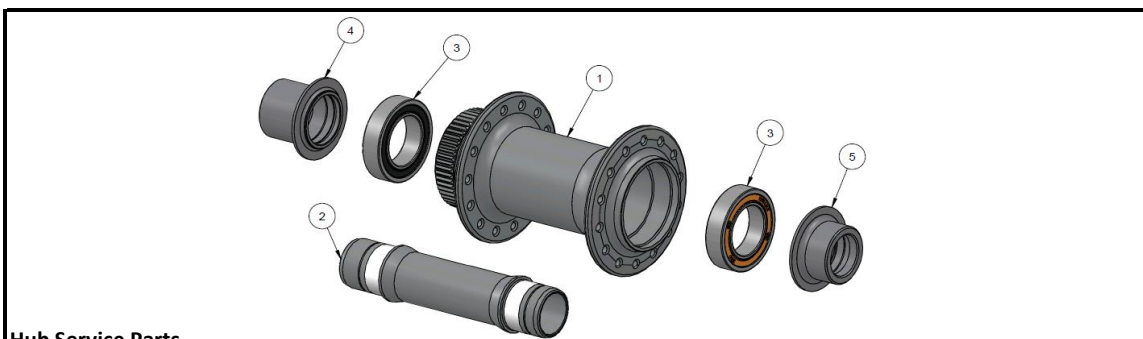

Hub Service Parts

| Diagram Number | TCG Part Number | Description |
|----------------|-----------------|--|
| 1 | NA | Hub Shell |
| 2 | 536867 | Axle (for 12mm endcaps) |
| 2 | 504292 | Axle (for 5mm & 15mm endcaps) |
| 3 | 431759 | Ball Bearing 18307 18x30x7mm |
| 4,5 | 536866 | 12mm End Caps |
| Not Pictured | W318502 | 5mm End Caps (not included with aftermarket wheel) |
| Not Pictured | 431778 | 15mm End Caps (not included with aftermarket wheel) |
| Not Pictured | 1051432 | Bontrager Centerlock Lockring for 5/12mm (not included with aftermarket wheel) |

Wheel Building Information and Specifications

| Value | Description or Specification |
|--|--|
| Wheel Building Information | |
| 0.4 | Hop (mm) |
| 0.4 | Wobble (mm) |
| 0.6 | Dish (mm) |
| NA | Wheel stress level disc side up (degrees of rotation, measured on Bontrager Stressor) |
| NA | Wheel stress level non-disc side up (degrees of rotation, measured on Bontrager Stressor) |
| 185 lbs min, 290 lbs max OR 84 kgf min, 130 kgf max | Spoke Tension - Disc Side |
| 100 lbs min, OR 45.4 kgf min | Spoke Tension, Non-Disc Side |
| Lacing Pattern disc side | Pulling spokes laced from inside of flange. Pushing spokes laced from outside flange. Spokes woven, pulling spoke on the outside of second cross. Second hole CW from the valve hole is a pulling spoke. |
| Lacing pattern non-disc side | Pulling spokes laced from outside of flange. Pushing spokes laced from inside flange. Spokes woven, pulling spoke on the outside of second cross. Second hole CW from the valve hole is a pushing spoke. |
| Additional build instructions | NA |
| Size Specifications | |
| 276mm | Spoke Length Drive |
| 277mm | Spoke Length Non-Drive |
| 579mm | Rim ERD |
| 35mm | Rim height |
| 27mm | Rim outer width |
| NA | Rim spoke offset |
| 19mm | Rim inner hook bead width |
| Other Specifications | |
| 745g | Wheel weight |
| NA | Rim weight |
| Carbon with Black decal | Wheel Color |
| Black | Hub color |
| Black | Spoke color |
| Carbon with Black decal | Rim color |
| 24 | Spoke Count |
| 14/15G | Spoke Gauge |
| Centerlock | Disc brake interface |
| Yes | Tubeless ready |